

2x6 FR Blocking

Fire-retardant treated wood blocking for non-structural steel framing

2x6 fire-retardant treated wood blocking for non-structural steel framing with dado groove to latch on to flanges and span between wall partitions to provide attachment surface for wall mounted fixtures.

2x6 FR Blocking is fire-retardant, pressure-treated wood that is chemically treated to reduce flamespread and smoke development. Fire-retardant wood complies with national building codes, including the International Building Code (IBC) and the International Residential Code (IRC).

D-Blaze® is a registered trademark of Viance, LLC.

PRODUCT DIMENSIONS

Size: 1-1/2" x 5-1/2" x 15-3/4"

FEATURES AND BENEFITS:



- D-Blaze® Fire-Retardant Treatment
- Constructed from Southern Yellow Pine (SYP)
- Dado groove provides secure and flush mounting surface
- Pre-cut for 16" o.c. spacing
- Provides reinforcement to the structural integrity of the walls for stability of wall-mounted fixtures
- 50 year warranty

INSTALLATION

Secure wood blocking into place using stainless steel or hot-dip galvanized fasteners. On one side, insert fasteners through the stud flange and into the face of the blocking and for the other side insert fasteners through the stud web and into the butt end of the blocking.

D-Blaze® Fire Retardant or D-Blaze® FRT Wood complies with or has been granted the following:

- GREENGUARD Gold Certified
 - ICC-ES ESR-2645
 - 2021 IBC
- (All are subject to revision, re-examination)

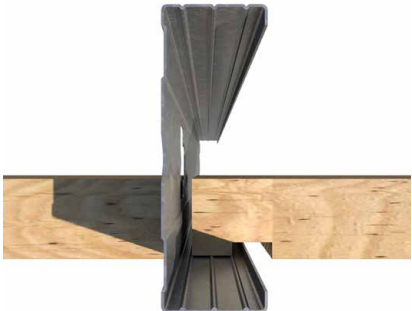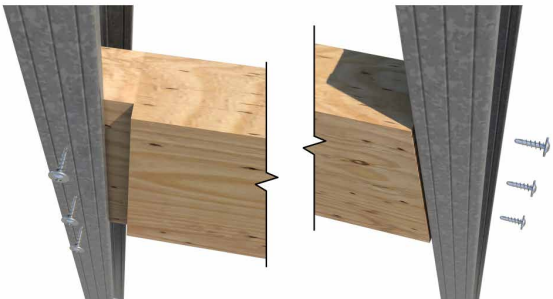

2x6 FR Blocking (FRB26-16)

Product Code	Thickness (in)	Height (in)	Length (in)	Pcs./Skid
FRB26-16	1-1/2	5-1/2	15-3/4	288

Material: Southern Yellow Pine (SYP) treated with D-Blaze® fire-retardant treatment
Product weight: 2.35 lbs. / piece